

# 8FT SINGLE PIN T8 LED TUBE LIGHT SPECIFICATION

527, NORTH POLK ST., PINEVILLE, NC-28134

PH: 704-835-1054 EMAIL: <u>SALES@SMARTLEDNC.COM</u>

WEBSITE: HTTPS://WWW.SMARTLEDNC.COM


#### 8FT SINGLE PIN T8 LED TUBE LIGHT SPECIFICATION



#### Main features:

- **XUL approved:8FT 50W**
- **X3Years warranty**
- **\*LM-80 2835SMD as lighting source,120LPW,80Ra.**
- **☆Good quality solid FA8 single PIN**
- XClear and frosted PC lens
- XSuper-thick patented aluminum heat sink and optical for

excellent heat dissipating

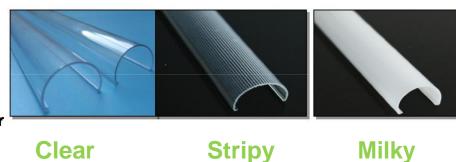

LM-80


#### **Parameters:**

Model	Wattage	Size	Input Voltage	Certification	Operation Condition	Lamp Holder	IP Grade
ML-T8506	50W	8FT	100-277Vac; 50/60HZ	UL	<b>-20</b> °C <sup>~</sup> 40°C	FA8	IP20

	Photometric			
LED	LM-80 SMD			
	>120LPW(clear PC)			
Luminance	>110LPW(frosted PC)			
CRI	80Ra			
R9	6			
CCT	2700K-6500K			

Basic Specification					
Driver	Built-in				
PF	0.9				
Boby Material	Aluminum				
Cover Material	PC(clear/frosted)				
Life Span	50000Hrs				
Warranty	2Years				

#### **Dimension:**

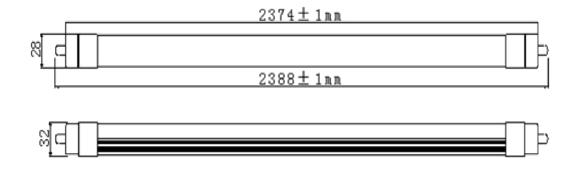

#### **Structure:**




WARNING:RISK OF ELECTRICAL SHOCK.TURN OFF POWER BEFORE INSTALLING,REMOVING OR INSPECTING. WARNING:ALL WIRING TO BE PERFORMED IN ACCORDANCE WITH ELECTRICAL CODE AND LOCAL ELECTRICAL CODE

WARNING:RISK OF FIRE.FIXTURES ARE RATED FOR USE IN 100-277Vac,50-60HZ PROTECTED CIRCUIT AND 90°C RATED SUPPLY WIRE.

WARNING:RISK OF CUT.THE ENCLOSED PRODUCT MAY HAVE SHARP EDGES, WEAR GLOVES TO PREVENT CUTS WHEN HANDING, REMOVING, INSTALLING AND MAINTAINING THIS PRODUCT.

#### **Installation Guide:**

- 1. Double ends connection;
- 2. Cut off power supply before installation Remove any components(ballast, starter, ect) from the fixture;
- 3.Installing tube light on the fixture(with FA8 holder) and check it again;
- 4. Power on, the tube can work

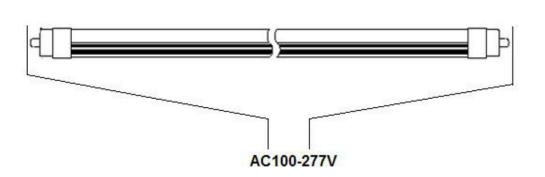



Metal clips reinforce if it is necessary

## Packaging:

Model No.	Pieces per carton	GW per carton	Carton size
ML-T8506	25PCS	31KGS	246*24*26cm

