

Specifications

- ★ Product name: LED Canopy Light (160W)
- ★ UPC Code: 0103494408424
- ★ L70>54000 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ Photo-electric Switch (Optional) – Listed (WJCT)
- ★ UL with 5 years Limited Warranty
- ★ System Watts: 160W
- ★ Voltages: 100-277Vac
- ★ CRI:70+
- ★ Operating Temp: -22 °F to +122°F
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 3000-5700K




➤ 160W Canopy Light

➤ 15680 lm

➤ 98 lm/W



UL#: E492883

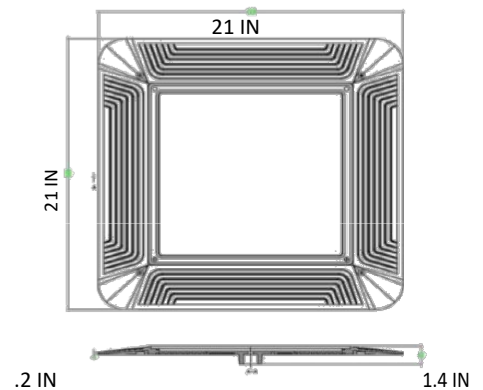

Order Information

M/N	Watts	Lumen Efficiency	Operation Volt.	CCT	Beam Angle	Replace HID/MH
SES-CP-160W-G-LV-N-WW	152.7	97.92lm/w	100-277Vac	3000K	104.6°	400~500W
SES-CP-160W-G-LV-N-NW	152.7	97.92lm/w	100-277Vac	4000K	104.6°	400~500W
SES-CP-160W-G-LV-N-DW	152.7	97.92lm/w	100-277Vac	5000K	104.6°	400~500W
CW SES-CP-160W-G-LV-N-	153.4	99.28lm/w	100-277Vac	5700K	Photometrics 104.6°	400~500W

Height	Average Lux(fc)	Light range (dia.)
3M	129.1	469.5cm
4M	72.6	626cm
5M	46.5	782.5cm
6M	32.3	939cm
7M	23.7	1095.5cm

AVERAGE BEAM ANGLE (50°H): 84.9 DE°