Double Side
LED Sign Tube

SMART ENERGY SOLUTIONS
NORTH CAROLINA

UL LISTED
E494563

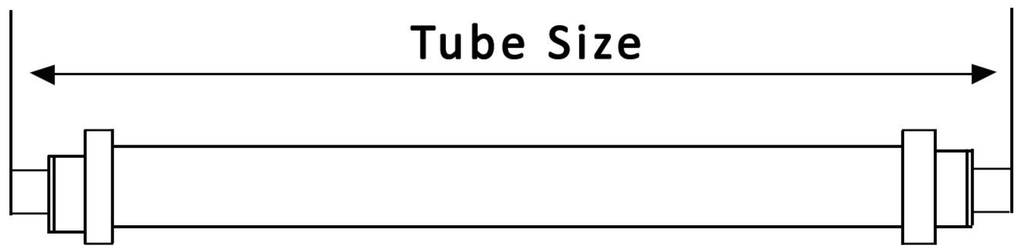

Features

- **RETROFIT KIT** - Super bright, efficient LED light. Lower energy consumption, maintenance free.
- **INTERNAL POWER SUPPLY** - No need for any External LED Driver or Ballast.
- **HEAD DISSIPATION** - Super heat dissipation structure, lower luminous decay, long lifespan.
- **TWO SIDE ILLUMINATION** - Circular tube with two sided LEDs, creates a wider illumination and it's an ideal solution for Pylon & Monument signs.

Specifications

Inpur Voltage	AC 100-277V
Operation Frequency	50/60Hz
PF	>0.9
CCT	6000K (Standard)
CRI	80Ra
Power Efficiency	>90%
Rated Life	50,000 Hrs.
Warranty	3 Years

Installation Specification

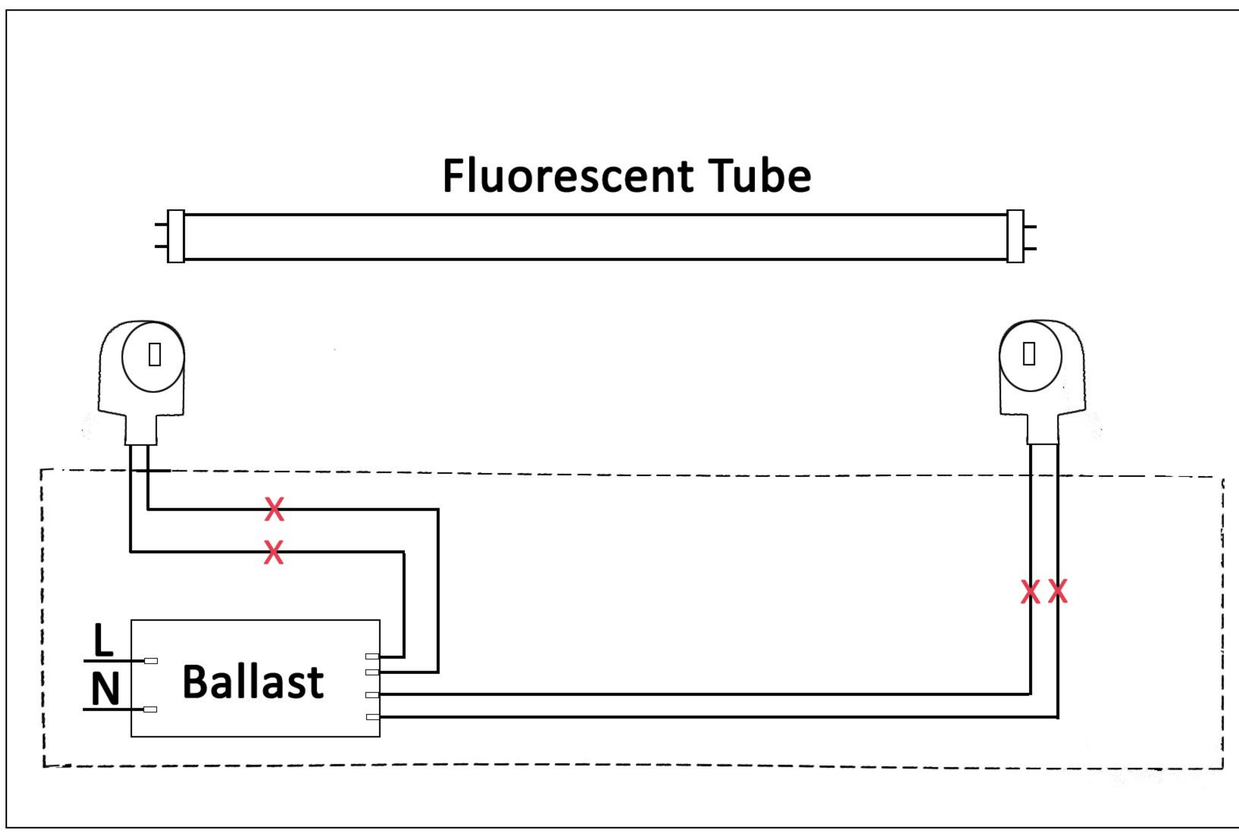

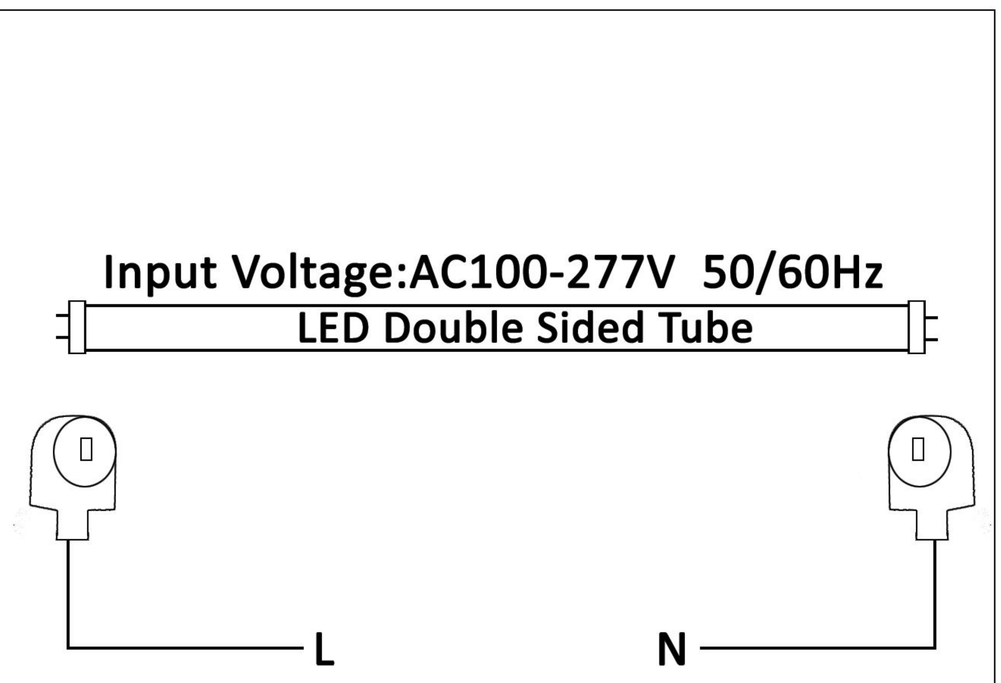

Parameters :

Model Name	Tube Size	Input Voltage	Wattage	Lumens	Cover
SL07T10XX0450	F18	AC100-277V	7W	910lm	Clear
SL13T10XX0600	F24	AC100-277V	13W	1560lm	Clear
SL13T10XX0750	F30	AC100-277V	13W	1690lm	Clear
SL16T10XX0900	F36	AC100-277V	16W	2080lm	Clear
SL21T10XX1050	F42	AC100-277V	21W	2700lm	Clear
SL21T10XX1200	F48	AC100-277V	21W	2730lm	Clear
SL28T10XX1500	F60	AC100-277V	28W	3640lm	Clear
SL28T10XX1600	F64	AC100-277V	28W	3640lm	Clear
SL38T10XX1800	F72	AC100-277V	38W	4750lm	Clear
SL38T10XX2100	F84	AC100-277V	38W	4750lm	Clear
SL51T10XX2475	F96	AC100-277V	51W	6630lm	Clear
SL51T10XX2700	F108	AC100-277V	51W	6630lm	Clear
SL60T10XX2925	F117	AC100-277V	60W	8450lm	Clear
SL60T10XX3000	F120	AC100-277V	60W	8450lm	Clear

Note :

1. XX in the Model Name represents CCT (3500K,4000K,5000K,6000K - Optional, In Stock 6000K)
2. **Tube Sizes are perfectly correlated with Fluorescent Tubes for hasslefree installation.**

SMART ENERGY SOLUTIONS
NORTH CAROLINA

527, N Polk St., Pineville,NC 28134
Email : sales@smartlednc.com
Web : https://www.smartlednc.com