




E502457



Features:

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.

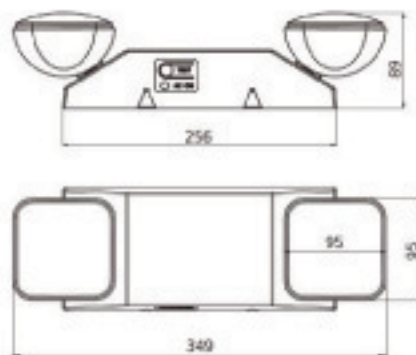

Ordering information

Model No.	Packing information	Options
WSL-EU9-B-E	40.7X32.5X23CM/6PCS 5/4KGS	REMOTE CAPABILITY