




NAME: LED Wall Pack

P/N: WSL-WP-120WB1

Advantage:

- UL cUL DLC certificate
- IP65 Internal driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

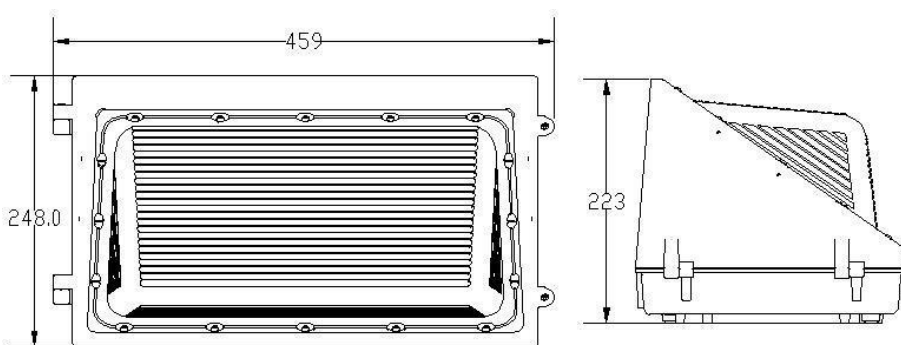

Application:

- ◆ entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting;
- ◆ Building, The hotel;
- ◆ Wall lighting area and so on.

Product Specifications

Product name	LED Wall Pack
Part No	WSL-WP-120WB1
Dimension	459*248*223mm

Technical Characteristic

Color temperature	3000K	3500K	4000K	4500K	5000K	5700K
CRI	>80					
Lumen	13800-15000LM					
Lumen Efficacy	115-125LM/W					
Input Power	120W					
Viewing Angle	110 Degree					
Input Voltage	100-277VAC 50/60Hz					
Driver model	China Brand Driver					
PF	>0.9					
Waterproof Rating	IP65					

Materials



LED Type	2835, 0.5W
LED QTY	420 PCS
Housing	Aluminum(ADC12) +PC
Housing color	Brown

Others

Operating Temperature	-20℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-30℃ TO 80℃
Storage Humidity	10%-95%
Application	Outdoor / Indoor
Safety Certification	UL cUL DLC
Warranty Time	5 Years Limited Warranty

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 122.50 lm/W
MODEL		I _{max} (cd)	5323	S/MH (C0/180)	1.20	
NOMINAL POWER (W)	120	LOR (%)	100.0	S/MH (C90/270)	0.64	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	14777	η UP, DN (C0-180)	19.4, 66.9	
NOMINAL FLUX (lm)	14776.7	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	0.6, 13.1	
LAMPS INSIDE	1	η up (%)	20.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120.0	η down (%)	80.0	CIBSE SHR MAX	1.30	

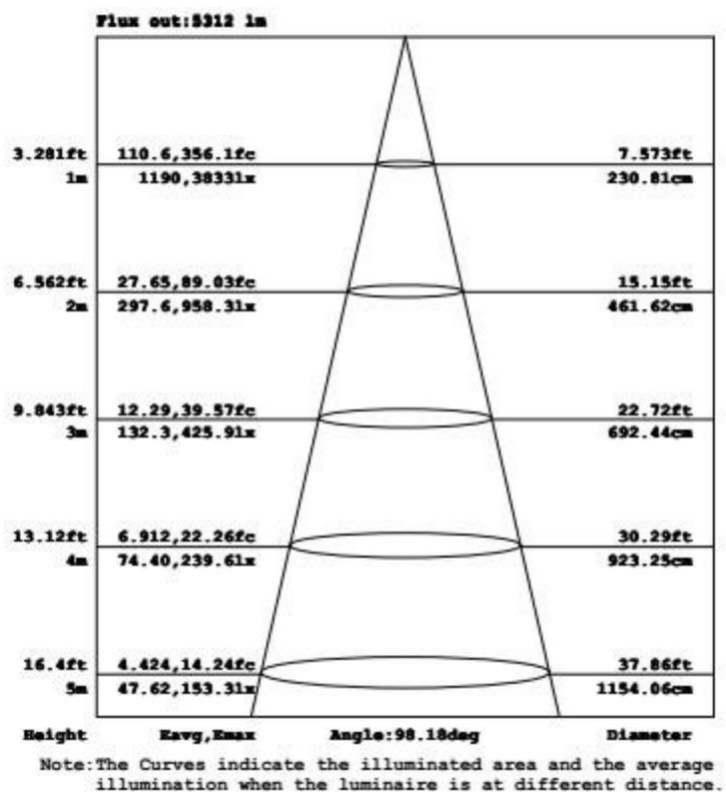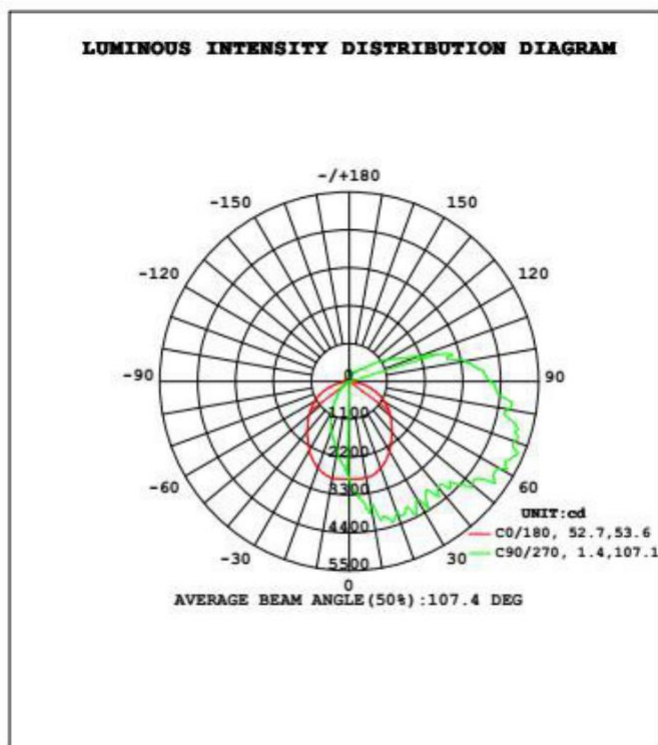

Package

Lamps Net Weight: 5.5 kg / pc

	Size	Qty/ Carton	Weight/ Carton
Cardboard	490*320*290mm	1	6.6 KG



Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection