



NAME: LED Wall Pack Light


P/N : WSL-WP03-15WC1

Advantage:

- UL cUL DLC certificate
- IP65 Internal driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.

Application:

- ◆ entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting;
- ◆ Building, The hotel;
- ◆ Wall lighting area and so on.

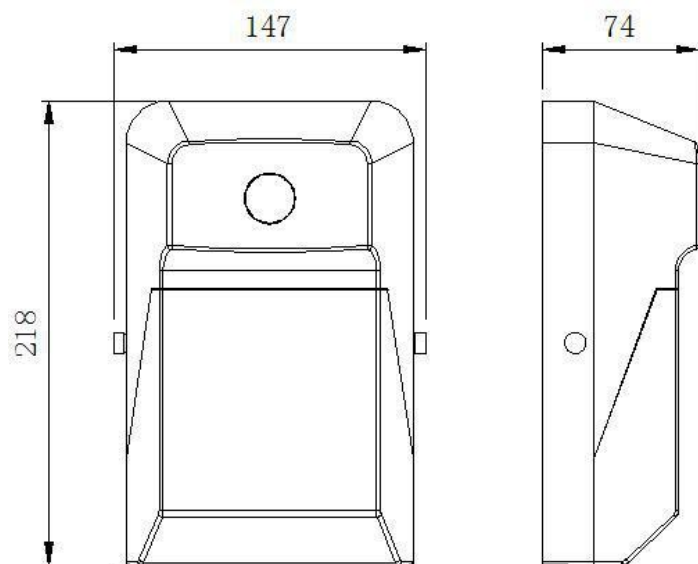

Product Specifications

Product name	LED Wall Pack Light
Part No	WSL-WP03-15WC1
Dimension	218*147*74 mm

Technical Characteristic

Color temperature	3000K	3500K	4000K	4500K	5000K	5700K
CRI	>80					
Lumen	1575-1720LM					
Lumen Efficacy	105-115LM/W					
Input Power	15W					
Viewing Angle	110°					
Input Voltage	100-277VAC 50/60Hz					
Driver model	China Brand Driver					
PF	>0.9					
Waterproof Rating	IP65					

Materials

LED Type	2835 (0.2W)
LED QTY	120 PCS
Housing	Aluminum
Housing color	Black

Others


Operating Temperature	-20℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-30℃ TO 80℃
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL cUL DLC
Warranty Time	5 Years Limited Warranty

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC	DATA Eff: 105.30 lm/W
MODEL		I _{max} (cd)	660.461
NOMINAL POWER(W)	15	LOR(%)	100.0
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	1605.8
NOMINAL FLUX(lm)	1605.80	CIE CLASS	DIRECT
LAMPS INSIDE	1	D _{up} (%)	9.5
TEST VOLTAGE(V)	277	down(%)	90.5

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0ft	1.16 fc	35.9 ft	41.4 ft
34.0ft	0.29 fc	71.7 ft	82.7 ft
51.0ft	0.13 fc	107.6 ft	124.1 ft
68.0ft	0.07 fc	143.4 ft	165.4 ft
85.0ft	0.05 fc	179.3 ft	206.8 ft
102.0ft	0.03 fc	215.2 ft	248.1 ft


■ Vert. Spread: 93.0°
■ Horiz. Spread: 101.2°

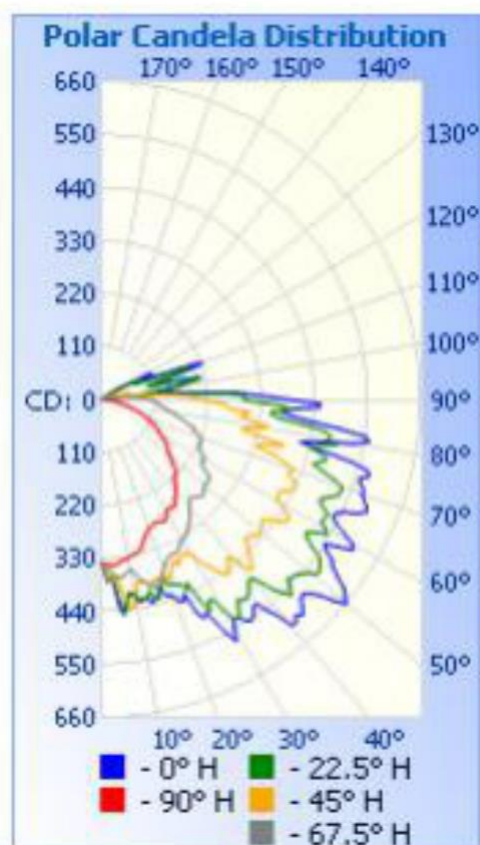

Package

Lamps Net Weight: 0.82kg / pcs

	Size	Qty/Carton	Weight/Carton
Outer box	405 X 325 X 250 mm	10	10 kg
Inner box	151 X 78 X 228 mm	1	0.92 Kg

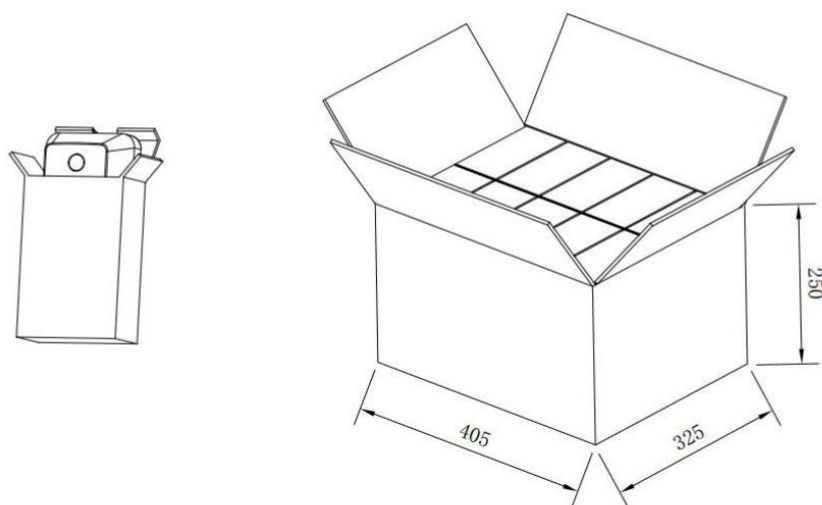

Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection